FLAME-MATE 2.0

CHINESE COOKING
EQUIPMENT
SERIES

FLAME-MATE
富利®

建宏國際有限公司
YPT International Ltd.

MANAGEMENT OFFICE & SHOWROOM |
1/F., NEW CITY CENTRE, 2 LEI YUE MUN ROAD,
KWUN TONG, KOWLOON, HONG KONG
TEL | 852-2723 2168 FAX | 852-2739 7576
WEBSITE | www.ypt.com.hk
E-MAIL | ypt@techwin.com.hk

YPT-1901-0001

WHY **FLAME-MATE 2.0**?

Offering the best kitchen equipment is our vision and it is also a momentum to drive us for continuous improvement and receive recognition. FLAME-MATE 2.0 is a sustainable development concept that we go further for the road of quality

ORIGINAL FLAME-MATE
Environmental Concept

FLAME-MATE 2.0
Sustainable development & improvement

MISSION

To achieve the ultimate goal of triple win scenario:

i. Higher yield of return for investor

ii. Better working environment for chef

iii. Possibility of Front of House dining experience for customer

To optimize the design outlook and cooking function of Chinese Cooking Equipment, make it becomes the best choice for premium kitchen and more user friendly in operation.

AREA TO FOCUS

REDUCED ENERGY AND COST

- Improve thermal efficiency of the equipment to achieve energy saving in all aspects including gas bills, electric bills from air-con to water consumption

IMPROVED KITCHEN ENVIRONMENT

- Minimize the usage of air blower and out-dated combustion technology, eliminate the source of noise

ADVANCED APPEARANCE AND FUNCTIONS

- Minimize rusting issue in humid working environment
- Unique equipment profile and make it outstanding in Front of House kitchen
- Further improve hygiene issue by applying advanced craftsmanship
- Cooking function upgrade to achieve user friendly experience and improve cooking quality

ORIGINAL FLAME-MATE
Environmental Concept

With this concept, we bring benefits from the advantage of energy efficiency and low noise in operation

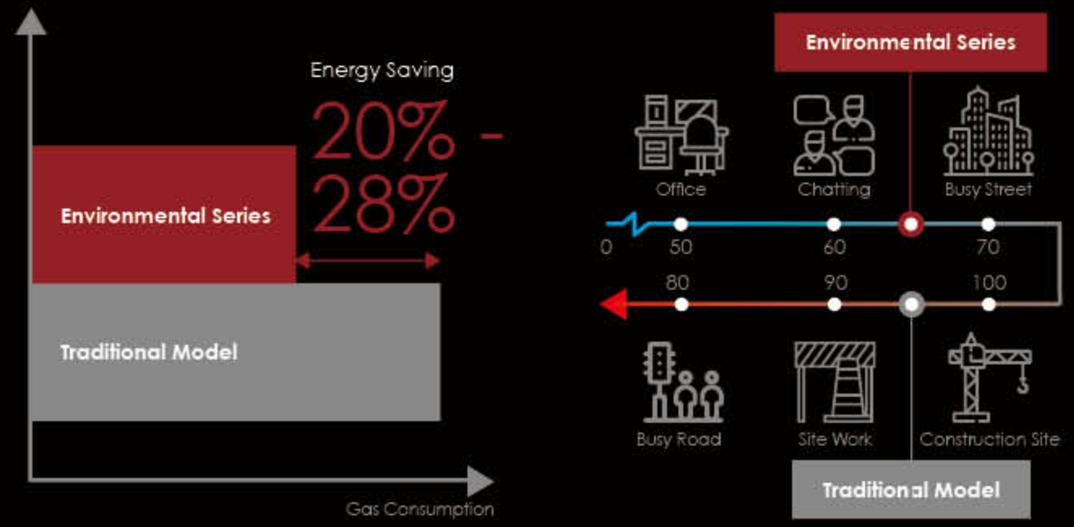

Reduced Energy And Cost

Our environmental series performs much better which create significant economical returns.

Improved Kitchen Environment

Thanks for environmental concept, it protects chef's health away from noise working environment.

CHEF'S BENEFITS

Better kitchen environment

Protection away from noise

Higher cooking efficiency

CUSTOMER'S BENEFITS

More enjoyment from show kitchen concept

Better quality and variety of food

TRIPLE WIN SCENARIO

RESTAURANT OWNER'S BENEFITS

Stable chef team from better environment

Better yield of return from reputation

Social responsibility of low carbon footprint

FLAME-MATE 2.0 -
Sustainable Development

We further improve the function by continuous R&D and machinery improvement, which providing the best equipment in the industry.

Advanced Appearance And Functions

More Durable in Material:

Applying S/S framework for rust resistance and strengthening the loading of the equipment

Iconic Profile

With prestige branding in the market, we are proud to introduce our unique profile for enlightening your eye sight in the kitchen

Advanced Craftsmanship

Thanks for the continuous improvement of the machinery, table top of most FLAME-MATE 2.0 equipment are made by single piece of 16 gauge sheet metal

Improved Cooking Functions

With continuous research & development, we have further enhanced the cooking function and the control interface for better user experience, efficiency on cooking and eventually on cooking improvement

CUSTOMIZATION OPTION
FOR FLAME-MATE 2.0

Cooking Suite

- Chinese cooking is one of the fusion food concept elements. Combination of different cooking function for a cooking suite will be definitely eye catching in the dining area.

Built-in / Slot-in Options

- With our built-in / slot-in concepts, it gives interior designer a room to achieve unique themes for the dining area without facing limitation of S/S craftsmanship.

Cantilever version

- Due to strict hygiene control for specific sectors such as hospital / elderly centre / air catering, our equipment with bullet feet can convert into cantilever version and mount on the service wall (by ID) with special brackets.

HIGHLIGHT OF

ENVIRONMENTAL COOKING RANGE

Environmental Features

Comparison between ECR Series and Traditional Model

	Environmental Burner	4" Mixing Burner	Benefits
Time required to boil 1L water	49sec	56sec	▲ Stronger flame
Operation Noise Level (w/o Wok)	<70dB(A)	<94dB(A)	▼ 24dB(A) less operational noise
Burner Rating	42kW / 48kW	56kW	▲ Save 28% gas consumption
Thermal Efficiency*	30.1% / 26.8%	18.7%	▲ Increase 11.4% / 8.1% for efficiency
CO Emission	<0.01%	<0.1%	▼ 10 times less for CO emission

* Tested according to CGAC standard:CJ/T187-2003

Safety Features

- Electromagnetic valve with FR sensor as flame failure device (i.e. gas cutoff <3s)
- 2 steps protection for enhanced safety concern

Durability, Hygiene& Interface Features

- Durable S/S frame structure for heavy duty usage
- One piece tabletop with extruded seamless wok chamber for working zone area
- One press design for flame failure, blower and ignition

COMMON FEATURES

1

Innovative pre-mix burner

Patent technology to reduce combustion noise (<75dB(A)) and improve thermal efficiency

2

One press ignition

User friendly for synchronizing ignition, blower and electromagnetic valve

3

Extra width chimney with cover

Enlarged exhaust area for better ventilation and further improve the stability of combustion

4

Seamless Table top and wok ring

Extruded seamless table top and wok ring for all food zone area. A sign of excellent craftsmanship

ECR-2-GF(E)5

5

One piece fire brick

3" thick heat resistance fire chamber in one piece formation for durability

6

Swing faucet

180° degree rotated for easy operation

Accessories

- 3" wok stand for wok holding
- Basket holder
- Cold water pan
- Wok clip
- Gas regulator
- Water regulator

ENVIRONMENTAL
COOKING RANGE

GUANG-DONG STYLE

Accessories (p.6)

- 3" wok stand
- 11" basket holder
- Cold water pan
- 5" heavy duty caster
- Wok clip
- Other export models are available CE SAE NSF

Custom solutions (p.4)

- Cantilever version
- Drop-in / Slot-in

ECR-2-GF(E)5

Features

Innovative 5" Pre-mix burner

Upgrade

Redesigned wok burner for wide spread of main flame and maintain high thermal efficiency

Rear pot system

Recycle of residue heat from the main burner for hot water preparation. It speeds up the cooking process and reduces the heat lost to surroundings

- **Guangdong Style**
  Model: ECR-1-GF(E)5 and ECR-2-GF(E)5
  - Ø13.5" slanted cast iron ring for 18-24" wok
- **Guangdong Compact Style**
  Model: ECR-1-NF(E)5 and ECR-2-NF(E)5
  - Ø13" slanted cast iron ring for 18-22" wok
- **Guangdong Banquet Style**
  Model: ECR-1-MF(E)5 and ECR-2-MF(E)5
  - Ø16" slanted cast iron ring for 24-28" wok

SPECIFICATIONS

Environmental Cooking Range

Single Head - Guangdong Style (Standard)

ECR-1-GF(E)5

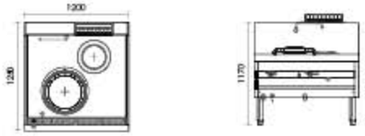

Dimension	1200 x 1250 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW
Voltage	220V/SPN/50Hz ; 130W
No. of Rear Pot / Rear Burner	1/0
Size of cast iron ring	Inner Ø13.5" for Ø18"-24" wok

Double Head - Guangdong Style (Compact)

ECR-1-NF(E)5

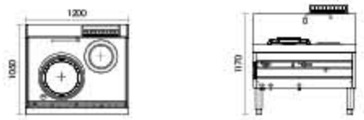

Dimension	1200 x 1050 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW
Voltage	220V/SPN/50Hz ; 130W
No. of Rear Pot / Rear Burner	1/0
Size of cast iron ring	Inner Ø13" for 18"-22" wok

Double Head - Guangdong Style (Standard)

ECR-2-GF(E)5

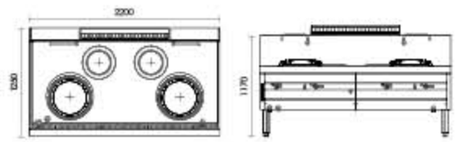

Dimension	2200 x 1250 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2 = 96kW
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	2 / 0
Size of cast iron ring	Inner Ø13.5" for Ø18"-24" wok

Double Head - Guangdong Style (Compact)

ECR-2-NF(E)5

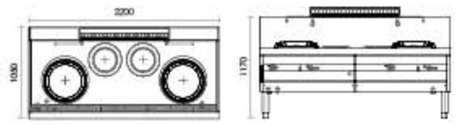

Dimension	2200 x 1050 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2 = 96kW
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	2 / 0
Size of cast iron ring	Ø13" for Ø18"-22" wok

Single Head - Banquet Style

ECR-1-MF(E)5

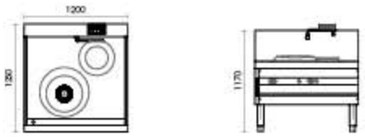

Dimension	1200 x 1250 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW
Voltage	220V/SPN/50Hz ; 130W
No. of Rear Pot / Rear Burner	1 / 0
Size of cast iron ring	Inner Ø16" for Ø24"-28" wok

Double Head - Banquet Style

ECR-2-MF(E)5



Dimension	2200 x 1250 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2 = 96kW
Voltage	220V / SPN / 50Hz, 130W x 2
No. of Rear Pot / Rear Burner	2 / 0
Size of cast iron ring	Inner Ø16" for Ø24"-28" wok

* All Specifications are subjected to change without prior notice.

ENVIRONMENTAL
COOKING RANGE

SHANG-HAI STYLE & CHIU CHOW STYLE

Accessories (p.6)

- 3" wok stand
- 11" basket holder
- Cold water pan
- 5" heavy duty caster
- Wok clip
- Other export models are available CE SIRIM NSF

Custom solutions (p.4)

- Cantilever version
- Drop-in / Slot-in
- Flat wok ring (Shang Hai only)

ECR-2-SF(E)5

Features

Rear burner
(Shanghai Style only)

6" mandarin burner for clay pot dishes and source preparation

Powerful Stock Pot burner
(Chiu Chow Style only)

3 rings burner with individual power control

- **Shanghai Style (1250 mm depth)**
  Model: ECR-1-SF(E)5 and ECR-2-SF(E)5
  - Ø13" slanted cast iron ring for 16-20" wok
- **Shanghai Compact Style (1050 mm depth)**
  Model: ECR-1-RF(E)5 and ECR-2-RF(E)5
  - Ø13" slanted cast iron ring for 16-20" wok
- **Chiu Chow Style (1250 mm depth)**
  Model: ECR-2-CF(E)5
  - Ø13.5" slanted cast iron ring for 18-24" wok

SPECIFICATIONS

Environmental Cooking Range

Single Head - Shanghai Style (Standard)

ECR-1-SF(E)5

Dimension	1400 x 1250 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW + 5kW = 53kW
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	1 / 1
Size of cast iron ring	Inner Ø13" for Ø16"-20" wok

Double Head - Shanghai Style (Standard)

ECR-2-SF(E)5



Dimension	2400 x 1250 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	(48kW + 5kW) x 2 = 106
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	2 / 2
Size of cast iron ring	Inner Ø13" for Ø16"-20" wok

Single Head - Shanghai Style (Compact)

ECR-1-RF(E)5

Dimension	1400 x 1050 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW + 5kW = 53kW
Voltage	220V/SPN/50Hz ; 130W
No. of Rear Pot / Rear Burner	1 / 1
Size of cast iron ring	Inner Ø13" for Ø16"-20" wok

Double Head - Shanghai Style (Compact)

ECR-2-RF(E)5



Dimension	2400 x 1050 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2 + 5kW = 101kW
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	2 / 1
Size of cast iron ring	Inner Ø13" for Ø16"-20" wok

Double Head - Chiu Chow Style

ECR-2-CF(E)5



Dimension	2500 x 1250 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2 + 14kW = 110kW
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	2 / 0
Size of cast iron ring	Inner Ø13.5" for Ø18"-24" wok

* All Specifications are subjected to change without prior notice.

ENVIRONMENTAL
COOKING RANGE

CHOP SUEY RANGE

Accessories (p.6)

- 3" wok stand
- 5" basket holder
- Cold water pan
- 5" heavy duty caster
- Other export models are available CE SIRIM NSF

Custom solutions (p.4)

- Cantilever version
- Drop-in / Slot-in

ESR-2-HF(E)

ESR-1-HF(E)

Features

Chop Suey cast iron ring

Exhaust at cast iron to shorten the depth of the equipment

Removable ingredient pan

Removable design to extend the working space for stir frying

- **Chop Suey Style (900 mm depth)**
  Model: ESR-1-HF(E) and ESR-2-HF(E)
  - Ø12.5" slanted cast iron ring for 14-16" wok

SPECIFICATIONS

Environmental Chop Suey Range

Single Head

ESR-1-HF(E)

Dimension	760 x 900 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	32kW
Voltage	220V/SPN/50Hz ; 100W
Size of cast iron ring	Inner Ø12.5" for Ø14"-16" wok

Double Head

ESR-2-HF(E)



Dimension	1500 x 900 x (810 + 360) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	32kW x 2 = 64kW
Voltage	220V/SPN/50Hz ; 100W x 2
Size of cast iron ring	Inner Ø12.5" for Ø14"-16" wok

* All Specifications are subjected to change without prior notice.

ENVIRONMENTAL
COOKING RANGE

LARGE WOK RANGE

Accessories (p.6)

- 11" basket holder
- Cold water pan
- 5" heavy duty caster

Custom solutions (p.4)

- Cantilever version
- Drop-in / Slot-in

ECR-2-BF(E)5

Features

32" cast iron wok

Equipped with large wok for bulk cooking purpose such as canteen, centralized kitchen, hospitals, etc.

Flame observation window

Observation window at front panel for easy access

- **Large Wok Range (1250 mm depth)**
  Model: ECR-1-BF(E)5 and ECR-2-BF(E)5
  - Built-in 32" wok

SPECIFICATIONS

Environmental Large Cooking Range

Single Head

ECR-1-BF(E)5

Dimension	1200 x 1250 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW
Voltage	220V/SPN/50Hz ; 130W
Size of wok	Built-in Ø32" wok

Double Head

ECR-2-BF(E)5



Dimension	2200 x 1250 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2 = 96kW
Voltage	220V/SPN/50Hz ; 130W x 2
Size of wok	Built-in Ø32" wok

* All Specifications are subjected to change without prior notice.

ENVIRONMENTAL
COOKING RANGE

OPEN KITCHEN TYPE - GUANG-DONG STYLE

ECR-2-LF(E)5

Accessories (p.6)

- 3" wok stand
- 8" stand type basket holder
- Cold water pan
- Wok clip

Features

Compact Cast iron ring

Inner dia. 13" cast iron for compact design

Deck Mounted Faucet

Low back splash with deck mounted faucet for elegant front of house display

- **Open Kitchen Guangdong Sytle (1050 mm depth)**

  Model: ECR-1-LF(E)5 and ECR-2-LF(E)5
  - Ø13" slanted cast iron ring for 18-22" wok
  - 100mm back splash
  - With rear pot

SPECIFICATIONS

Open Kitchen Type Environmental Cooking Range

Single Head - Guangdong Style

ECR-1-LF(E)5

Dimension	1200 x 1050 x (810 + 100) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW
Voltage	220V/SPN/50Hz ; 130W
No. of Rear Pot / Rear Burner	1 / 0
Size of cast iron ring	Inner Ø13" for Ø18"-22" wok

Double Head - Guangdong Style

ECR-2-LF(E)5



Dimension	2200 x 1050 x (810 + 100) mm H
Fuel	DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2= 96kW
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	2 / 0
Size of cast iron ring	Inner Ø13" for Ø18"-22" wok

* All Specifications are subjected to change without prior notice.

ENVIRONMENTAL
COOKING RANGE

OPEN KITCHEN TYPE - SHANG-HAI STYLE

ECR-2-PF(E)5

Accessories (p.6)

- 3" wok stand
- 8" stand type basket holder
- Cold water pan
- Wok clip

Features

Louver panel

Aesthetically design with full panel, louvers and skirt panel for front of house kitchens

Rear burner

6" mandarin burner at behind

- **Open Kitchen Shanghai Style (1050 mm depth)**
  Model: ECR-1-PF(E)5 and ECR-2-PF(E)5
  -Ø13" slanted cast iron ring for 16-20" wok
  100 mm back splash
  With rear pot and rear burner
- **One rear burner for ECR-2-PF(E)5 only**

SPECIFICATIONS

Open Kitchen Type Environmental Cooking Range

Single Head - Shanghai Style

ECR-1-PF(E)5

Dimension	1400 x 1050 x (810 + 100) mm H
Fuel	DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW + 5kW = 53kW
Voltage	220V/SPN/50Hz ; 130W
No. of Rear Pot / Rear Burner	1 / 1
Size of cast iron ring	Inner Ø13" for Ø16"-20" wok

Double Head - Shanghai Style

ECR-2-PF(E)5



Dimension	2400 x 1050 x (810 + 100) mm H
Fuel	DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW x 2 + 5kW = 101kW
Voltage	220V/SPN/50Hz ; 130W x 2
No. of Rear Pot / Rear Burner	2 / 1
Size of cast iron ring	Inner Ø13" for Ø16"-20" wok

* All Specifications are subjected to change without prior notice.

HIGHLIGHT OF

EUROCOMPACT STYLE

Environmental Features

	Premix Burner	Atmospheric Burner	Jet Burner	Benefits for Premix Burner
Flame Shape	Strong & Intensive	Weak & Diversify	Moderate	▲ Improve food quality
Air Blower	YES	NO	NO	▲ Stronger flame
Thermal Efficiency	High	Low	Medium	▲ Save gas consumption

Safety Features

- Electromagnetic valve with FR sensor as flame failure device (i.e. gas cutoff <3s)
- 2 steps protection for enhanced safety concern

Durability, Hygiene& Interface Features

- Durable S/S frame structure for heavy duty usage
- One piece tabletop with extruded seamless wok chamber for working zone area
- One press design for flame failure, blower and ignition

COMMON FEATURES

1

Detachable design

Removable Ø12" cast iron ring and insulation chamber for easy transportation

2

One press ignition

User friendly design for synchronizing ignition, blower and electromagnetic valve

3

Empty bottom design

Full width crumb tray will collect the waste from the empty bottom chamber

ESR-20-AC

4

Drainage with sieve

Prevent clogging of drainage

5

Rear burner

Optional rear burner for extra cooking capacity

6

Front water valve

Chromed front water valve for convenient operation

Accessories

-  3" wok stand for wok holding
- Basket holder
- Cold water pan
- 5" heavy duty caster
- Other export models are available

Custom solutions

- Cantilever version
- Drop-in / Slot-in

SPECIFICATIONS

Environmental Cooking Range – Euro Compact

Model	Dimension	Fuel	Water Inlet / Drainage	Burner Ratings	
Single Burner					
ESR-10AC	750 x 1000 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW	
ESR-10BC	750 x 900 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW	
ESR-10CC	750 x 750 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW	
Single Burner with Single Rear Burner					
ESR-11AC	900 x 1000 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW + 5kW = 30kW	
ESR-11ALC	900 x 1000 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW + 5kW = 30kW	
ES -11BC	1000 x 900 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW + 5kW = 30kW	
ESR-11BLC	1000 x 900 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW + 5kW = 30kW	
ESR-11CC	1100 x 750 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW + 5kW = 30kW	
ESR-11CLC	1100 x 750 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW + 5kW = 30kW	
Double Burner					
ESR-20AC	1500 x 1000 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 = 50kW	
ESR-20BC	1500 x 900 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 = 50kW	
ESR-20CC	1500 x 750 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 = 50kW	

SPECIFICATIONS

Model	Dimension	Fuel	Water Inlet / Drainage	Burner Ratings	
Double Burner with Single Rear Burner					
ESR-21AC	1500 x 1000 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 + 5kW = 55kW	
ESR-21BC	1500 x 900 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 + 5kW = 55kW	
ESR-21CC	1500 x 750 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 + 5kW = 55kW	
ESR-21XC	1200 x 1000 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 + 5kW = 55kW	
Double Burner with Double Rear Burner					
ESR-22AC	1650 x 1000 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 + 5kW x 2= 60kW	
ESR-22BC	1850 x 900 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 + 5kW x 2= 60kW	
ESR-22CC	1850 x 750 x (810 + 360) mm H	NG: DN20 LPG: DN20 TG: DN20	DN15 / DN40	25kW x 2 + 5kW x 2= 60kW	
Triple Burner					
ESR-30AC	2250 x 1000 x (810 + 360) mm H	NG: DN40 LPG: DN40 TG: DN40	DN15 / DN40	25kW x 3 = 75kW	
ESR-30BC	2250 x 900 x (810 + 360) mm H	NG: DN40 LPG: DN40 TG: DN40	DN15 / DN40	25kW x 3 = 75kW	
ESR-30CC	2250 x 750 x (810 + 360) mm H	NG: DN40 LPG: DN40 TG: DN40	DN15 / DN40	25kW x 3 = 75kW	
Triple Burner with Double Rear Burner					
ESR-32AC	2250 x 1000 x (810 + 360) mm H	NG: DN40 LPG: DN40 TG: DN40	DN15 / DN40	25kW x 3 + 5kW x 2 = 85kW	
ESR-32BC	2250 x 900 x (810 + 360) mm H	NG: DN40 LPG: DN40 TG: DN40	DN15 / DN40	25kW x 3 + 5kW x 2 = 85kW	
ESR-32CC	2250 x 750 x (810 + 360) mm H	NG: DN40 LPG: DN40 TG: DN40	DN15 / DN40	25kW x 3 + 5kW x 2 = 85kW	
ESR-32XC	1750 x 1000 x (810 + 360) mm H	NG: DN40 LPG: DN40 TG: DN40	DN15 / DN40	25kW x 3 + 5kW x 2 = 85kW	

* Size of cast iron ring: Inner Ø12" for Ø14"-16" wok for all items under Euro Compact Series.
* Each main burner head need: 220V / 5PN / 50-60 Hz; 100W for air blower.
* All Specifications are subjected to change without prior notice.
* CE versions are available

HIGHLIGHT OF
ENVIRONMENTAL STEAMER

Environmental Features

Comparison between Environmental Steamer and Traditional Model

	Environmental Steamer	Traditional Model	Benefits
Burner Rating	42kW	56kW	▲ 25% less gas consumption
Operational Noise Level	<65dB(A)	85dB(A)	▼ 20dB(A) less operational noise
Steam Volume	50kg	49kg	▲ More steam volume
Thermal Efficiency*	84.7%	60%	▲ Increase 24.7% for efficiency
CO Emission	<0.05%	<0.1%	▼ 20 times less for CO emission

* Tested according to CGAC standard: CJ/T187-2003

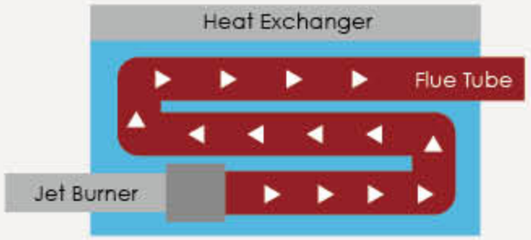

Safety Features

- Electromagnetic valve with FR sensor as flame failure device (i.e. gas cutoff <3s)
- Water level detection and overheat protection provide additional safety protection

Durability, Hygiene& Interface Features

- Durable S/S frame structure for heavy duty usage
- One press design for flame failure and ignition

COMMON FEATURES

1

Seamless table top

Extruded seamless table top and wok ring for all food zone area.
A sign of excellent craftsmanship

2

Water proof cover for control panel

Electronic parts install behind the water proof panel for better protection

3

Drainage valve

Individual drainage valve for removing the heat exchanger's water to prevent limescale accumulation

4

Steam control valve

A device to guide steam to specific steamer head
(For ECS-2C & ERS-2C)

ERS-2C

5

3 steps power settings

Allow chef to control 3 levels of power depends on their needs

6

Front water valve for faucet

Chromed front water valve for convenient operation

7

Water trough

Removable design for easy cleaning

Accessories

- 7 Hole plate with S/S tray Stand

- Rice roll adaptor
  - Single:CRS-001
  - Double: CRS-002

- Full Set dimsum Tray
- Gas regulator
- Water regulator & water softener
- Deck mount faucet and low backplash for front of house profile

ENVIRONMENTAL
STEAMER

DIM SUM STEAMER

ERS-2C

ECS-1C

Accessories (p.24)

- 7 Hole plate with S/S tray Stand
- Full Set dimsum Tray
- Rice roll adaptor
- 5" heavy duty caster
- Other export models are available CE SIRIM NSF

Custom solutions (p.4)

- Cantilever version
- Front of house profile
- Drop-in / Slot-in

Features

Built in rice roll pan

Built in double rice roll pan for easy and massive steaming.

Steam distributor

It allows steam to spread in all direction and have even heat distribution

- **Front of house profile is available**
  - Low backsplash with louver panel
  - Deck mounted faucet

SPECIFICATIONS

Environmental Steamer

Single Unit

ECS-1C



Dimension	900 x 1050 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	70 baskets of Dim Sum at maximum per time

Double Unit

ECS-2C



Dimension	1500 x 1050 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	56kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	140 baskets of Dim Sum at maximum per time

Environmental Rice Roll Steamer

Double Unit

ERS-2C





Dimension	1200 x 1050 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	Double rice roll tray for mass production

* All Specifications are subjected to change without prior notice.

ENVIRONMENTAL
STEAMER

KETTLE TYPE STEAMER

Accessories (p.24)

- 7 Hole plate with S/S tray Stand
- Full Set Dim Sum Tray
- Rice roll adaptor
- 5" heavy duty caster
- Other export models are available CE SIRIM NSF

Custom solutions (p.4)

- Cantilever version
- Front of house profile
- Flat base for plinth installation

EKS-2E

EKS-1E

Features

Kettle steaming concept

Equipped with powerful burner system for rapid steam generation of 90L kettle

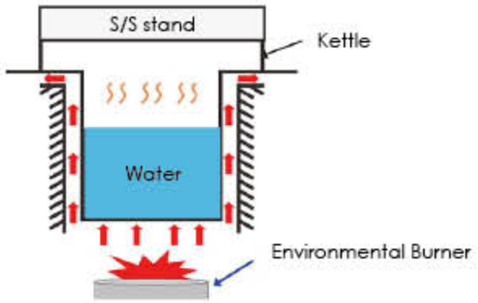

Upgraded pre-mixed burner

Equipped with 4" environmental burner for 28% of energy saving and low noise operation

- **Versatile cooking function for steaming or boiling**
- **Front of house profile is available**
  - Low backsplash with louver panel
  - Deck mounted faucet

SPECIFICATIONS

Environmental Kettle Type Steamer

Single Head

EKS-1E

Dimension	1250 x 1050 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW
Voltage	220V/SPN/50Hz ; 130W
Capacity	Ø23" x 16" Kettle x 1

Double Head

EKS-2E



Dimension	2200 x 1050 x (810 + 360) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW x 2 = 84kW
Voltage	220V/SPN/50Hz ; 130W x 2
Capacity	Ø23" x 16" Kettle x 2

* All Specifications are subjected to change without prior notice.

HIGHLIGHT OF

ENVIRONMENTAL STEAM CABINET

Environmental Features

Comparison between Environmental Steamer and Traditional Model

	Environmental Steamer	Traditional Model	Benefits
Burner Rating	42kW	56kW	▲ 25% less gas consumption
Operational Noise Level	<65dB(A)	85dB(A)	▼ 20dB(A) less operational noise
Steam Volume	50kg	49kg	▲ More steam volume
Thermal Efficiency*	84.7%	60%	▲ Increase 24.7% for efficiency
CO Emission	<0.05%	<0.1%	▼ 20 times less for CO emission

* Tested according to CGAC standard: CJ/T187-2003

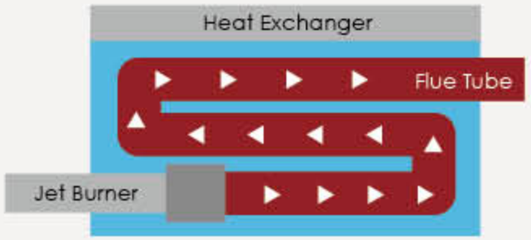

Safety Features

- Electromagnetic valve with FR sensor for the flame failure device (i.e. gas cutoff <3s)
- Water level detection and overheat protection

Durability, Hygiene& Interface Features

- Durable S/S frame structure for heavy duty usage
- Digital timer and temperature display (For 2 deck / 3 deck only)
- One press design for flame failure device and ignition

COMMON FEATURES

1

Rotary lock handle with 2 steps closing door

The rotary lock prevents the steam leakage and the 2 steps closing door to secure the chef not injured by hot steam

2

Slanted top design

Prevent contamination from condensation dripping

3

Pull out shelving with latch system

Latch system secure the shelving from drop off after pull out

ESC-3HC

4

Plug in door gasket

For easy replacement to prevent steam leaking

5

Accessible boiler tank

Allows easy checking of water level and descaling maintenance

6

Adjustable rail

Easy adjustment for additional shelves

7

Drainage valve

Individual drainage valve for removing the heat exchanger's water to prevent limescale accumulation

Accessories

- GN 1/1 or GN 2/1 Pan, 2.5"H or 4" H
- 17" Rice pan

- 400 x 600 x 65 mm S/S rice pan (ESC-2BC only)
- Gas regulator
- Water regulator & water softener

ENVIRONMENTAL
STEAMER CABINET

SINGLE DOOR / BUTTERFLY OPEN DOOR

ESC-1VC

ESC-2BC

Features

Shelving System
(ESC-1VC)

Multi shelving system for mass steaming purpose

Extra size chamber
(ESC-2BC)

Butterfly door open design with additional volume of chamber for bulk cooking

- Single Door Version

Model: ESC-1VC
- Inner chamber dimension: 600 x 655 x 948 mm
- 8 layers shelving included

- Butterfly Door Version

Model: ESC-2BC
- Inner chamber dimension:
  420 x 635 x 950 mm x 2 sides
- Comes with 20 pairs of rails for
  400 x 600 mm pan (not included)

Accessories (p.30)

- Extra railways & S/S shelvings
- 5" heavy duty castors
- 17" rice pan
- Flat base for plinth installation
- 400 x 600 x 65mm H rice pan (ESC-2BC)
- CE and CSA version are available

SPECIFICATIONS

Environmental Steam Cabinet

Single Door

ESC-1VC

Dimension	800 x 880 x 1800 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	8 layers shelving

Double Door - Butterfly Open Door

ESC-2BC

Dimension	1150 x 880 x 1800 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	50kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	20 pairs of rail rack for 400 x 600 mm pan

* All Specifications are subjected to change without prior notice.

ENVIRONMENTAL
STEAM CABINET

DOUBLE DOORS

Accessories (p.30)

- Extra rail & S/S shelvings
- 5" heavy duty castors
- 17" rice pan
- Flat base for plinth installation
- 400 x 600 x 65mm H rice pan (ESC-2BC)
- CE and CSA version are available

ESC-2HC

Features

Steam control Valve

Equipped with steam On/off valve for further energy saving

Double Door Version – Horizontal

Model: ESC-2HC
- Inner chamber dimension:
  655 x 600 x 405 mm x 2nos
- 4 layers shelving

Double Door Version – Vertical

Model: ESC-2VC
- Inner chamber dimension:
  546 x 654 x 420 mm x 2nos
- Designed for GN 2/1 x 2.5"H Pans x 6nos

- Timer alert and temperature display for individual chamber

ESC-3HC

Features

Multiple chambers

2 small and 1 large chambers for steaming various dishes at the same time

Timer alert and temperature display

Improved interface and alerting system for a precise control of steaming process

Triple Door Version

Model: ESC-3HC
- Inner chamber dimension:
  655 x 600 x 220 mm x 2nos
- Inner chamber dimension:
  655 x 600 x 400 mm x 1nos
- 4 layers shelving

Triple Door Version – Extra width

Model: ESC-3HX
- Inner chamber dimension:
  955 x 600 x 220 mm x 2nos
- Inner chamber dimension:
  955 x 600 x 400 mm x 1nos
- 4 layers shelving

ENVIRONMENTAL
STEAM CABINET

TRIPLE DOORS

Accessories & Options (p.30)

- Extra railways & S/S shelvings
- 5" heavy duty castors
- Flat base for plinth installation
- 17" rice pan
- CE and CSA version are available

SPECIFICATIONS

Double Door - Vertical Open Door

ESC-2HC



Dimension	900 x 880 x 1765 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	Equipped with 4 pairs of rail for shelves

Double Door - Horizontal Open Door

ESC-2VC



Dimension	800 x 880 x 1800 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	Equipped with 4 pairs of rail for shelves

Triple Door

ESC-3HC



Dimension	900 x 880 x 1900 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	42kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	Equipped with 4 pairs of rail for shelves

Triple Door - 1200 mm Width

ESC-3HX



Dimension	1200 x 880 x 1900 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	56kW
Voltage	220V/SPN/50Hz ; 25W
Capacity	Equipped with 4 pairs of rail for shelves

ESC-1RC

ENVIRONMENTAL
STEAM CABINET

ROLL-IN STEAM CABINET

Features

Digital Control Panel

Equipped with digital control panel, timer function and eco steam function for all types of steaming purposes

Double insulated glass door

Double layers tempered glass to prevent hot surface for the working zone

S/S GN Trolley

Trolley with latching system, accommodate:
- GN 2/1 pans x 13nos or
- GN 1/1 pans x 26nos

- **Superheated steam function (130°C) for special cooking purpose**
- **Slanted top to prevent condensation dripping**
- **Double door lock to ensure no steam leaking**

Accessories & Options (p.30)

- Gastronorm Pan (Either GN2/1 or GN1/1)
- Extra trolley

Environmental Roll - in Steam Cabinet

ESC-1RC



Dimension (mm)	1250 x 880 x 1800 mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
Water Inlet / Drainage	DN15 / DN40
Burner Rating (kW)	50kW
Voltage	220V/SPN/50Hz ; 3050W
Capacity	13 levels Trolley (For FN 2/1 Pan)

* All Specifications are subjected to change without prior notice.

HIGHLIGHT OF

OPEN FLAME RANGE & STOCK POT STOVE

Safety Features

- Flame failure device

Durability, Hygiene & Interface Features

- Durable S/S frame structure for heavy duty usage
- One piece molded grating

Accessories

- Wall mounted faucet (SPS series only)
- Underneath Shelving (OFR Series)
- Gas regulator

COMMON FEATURES

Burner ring selection

Single ring or powerful double ring

Pilot with cover

Prevent pilot extinguish away from drips or liquid

One piece molded grating

One Piece molded design helps to improve the loading and performs better outlook of the equipment

Removable crumb tray

Full width design for easy cleaning

SPS-1-8F(S)

OFR-4-DF(S)

OPEN FLAME RANGE

OFR-4-DF(S)

Custom solutions

- Cantilever version
- Underneath shelving
- Underneath electric oven with legs
  (Model: RN-2111D)

Dimension: 810 x 718 x 490 mmH

Power: 220V SPN, 50/60Hz, 5kW

SPECIFICATIONS

Open Flame Range

Single Ring 4" Burner

OFR-4-BF(S)

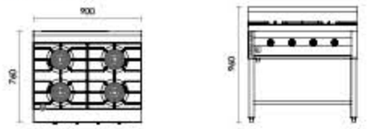

Dimension	900 x 760 x (810 + 150) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø6"mandarin burner x 4
Burner Ratings	5kW x 4 = 20kW

Double Ring 4" Burner

OFR-4-DF(S)

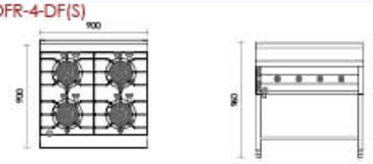

Dimension	900 x 900 x (810 + 150) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø7"mandarin burner x 4
Burner Ratings	7kW x 4 = 28kW

Single Ring 6" Burner

OFR-6-BF(S)

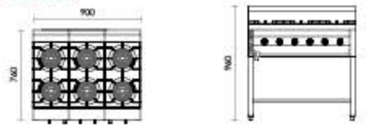

Dimension	900 x 760 x (810 + 150) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø6"mandarin burner x 6
Burner Ratings	5kW x 6 = 30kW

Double Ring 6" Burner

OFR-6-DF(S)

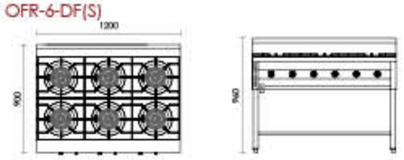

Dimension	1200 x 900 x (810 + 150) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø7"mandarin burner x 6
Burner Ratings	7kW x 6 = 42kW

* All Specifications are subjected to change without prior notice.

STOCK POT STOVE

Custom solutions

- Cantilever version
- Wall mounted faucet with high back splash

SPS-1-8F(S)

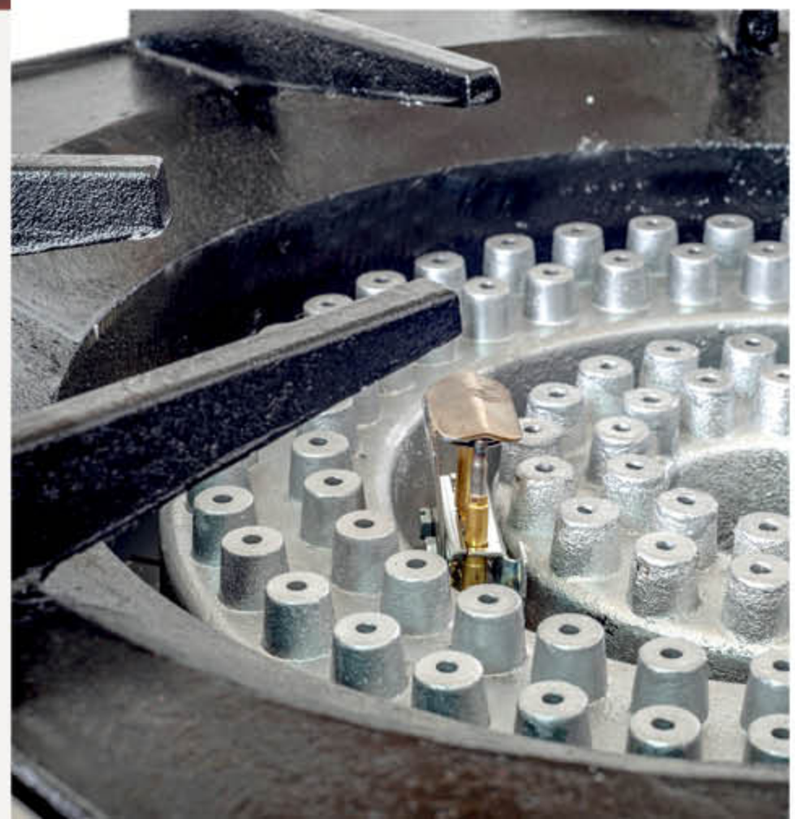

SPECIFICATIONS

Stock Pot Stove

Single Head with Single Ring Burner

SPS-1-8F(S)

Dimension	550 x 650 x (500 + 200) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø8" single ring burner x 1
Burner Ratings	14kW

Single Head with Double Ring Burner

SPS-1-14F(S)

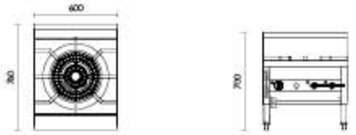

Dimension	600 x 760 x (500 + 200) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø14" double ring burner x 1
Burner Ratings	24kW

Double Head with Single Ring Burner

SPS-2-8F(S)

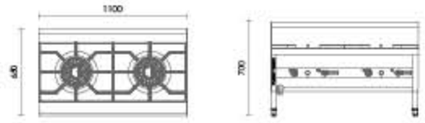

Dimension	1100 x 650 x (500 + 200) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø8" single ring burner x 2
Burner Ratings	14kW x 2 = 28kW

Double Head with Single Ring Burner (Vertical)

SPS-2-8V(S)



Dimension	550 x 1100 x (500 + 200) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø8" single ring burner x 2
Burner Ratings	14kW x 2 = 28kW

Double Head with Double Ring Burner

SPS-S-14F(S)

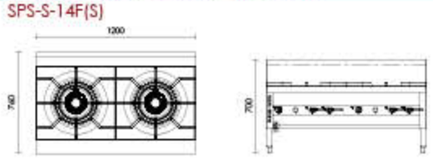

Dimension	1200 x 760 x (500 + 200) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø14" double ring burner x 2
Burner Ratings	24kW x 2 = 48kW

Double Head with Double Ring Burner (Vertical)

SPS-2-14V(S)



Dimension	600 x 1250 x (500 + 200) mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
No. of Burner	Ø14" double ring burner x 2
Burner Ratings	24kW x 2 = 48kW

* Ø500-500 mm stock pot for all items under Stock Pot Stove series
* All Specifications are subjected to change without prior notice.

ENVIRON-MENTAL STOCK POT STOVE AND SOUP KETTLE

EPS-1-F

ECK-1E

Custom solutions

- Wall mounted faucet with high back splash

Features

Pre-mixed burner

Equipped with environmental burner to generate powerful flame for heavy duty cooking

Simple control interface

One press ignition allows user to turn on the main flame easily

- **Special designed grating to enhance thermal efficiency**
- **Electromagnetic valve with FR sensor as flame failure device (i.e. gas cutoff <3s)**
- **Operational noise level <75dB(A)**
- **One piece molded fire brick for insulation (EPS only)**

Highlight Features

Built-in soup kettle (For EPS only)

Equipped with 250L soup kettle with strainer for bulk soup cooking purpose

Soup dispenser (For EPS only)

Located at the front left hand panel for soup dispensing

SPECIFICATIONS

Environmental Stock Pot Stove w/blower

Single Unit

EPS-1-F

Dimension	600 x 760 x (600 + 200) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Burner Ratings	28kW
Voltage	220V/SPN/50Hz ; 100W

Double Unit

EPS-2-F



Dimension	1200 x 760 x (600 + 200) mm H
Fuel	NG: DN40 ; LPG: DN40 ; TG: DN40
Burner Ratings	28kW x 2 = 56kW
Voltage	220V/SPN/50Hz ; 100W x 2

*Ø500-500 mm for all items under Stock Pot Stove w /blower series

Environmental Soup Kettle

Single Head

ECK-1E

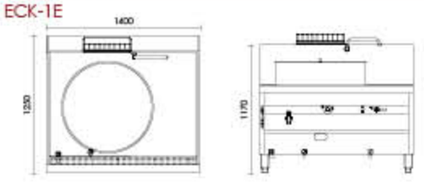

Dimension	1400 x 1250 x (810 + 360) mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Water Inlet / Drainage	DN15 / DN40
Burner Ratings	48kW
Voltage	220V/SPN/50Hz ; 130W
Capacity	280L

* All Specifications are subjected to change without prior notice.

HIGHLIGHT OF

DUCK ROASTER & PIG ROASTER

Safety Features

- Flame failure device

Durability, Hygiene & Interface Features

- Durable S/S frame structure for heavy duty usage
- Insulated model is available

Accessory

- Gas regulator

COMMON FEATURES

Overflow design for grease

Excessive grease will be removed via overflow tube for easy cleaning

Observation window

It allows a chef to control the cooking process through regular observation

Lava Rocks

Lava rocks ensure the heat is evenly distribute during cooking process

CDR-8S

CPR-096WS

Crumb tray

Prevent grease and dirt drip on the floor for better hygiene

Separate burner control

Allow chef to control the burner more accurately

DUCK ROASTER

CDR-10S

CDR-8S

Features

A

Hanging ring

Located at perfect height for easy handling of the ducks during cooking process

B

Thermometer

Allows precise manipulation of the flame level

C

Insulated body

(For all double layers model)
Mild steel inner layer to enhance the cooking efficiency and prevent overheat body structure

D

Manual rotary wheels

Mounted at the top of the roaster cover for hanging full height pig roasting
(For CDR-10S only)

- **Lava rock stand**
- **Ventilation hole at the cover for heat exhaust**

SPECIFICATIONS

Duck Roaster

32" Single Layer

CDR-8S



Dimension	Ø810 x 1400 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Oil Overflow Pipe	Ø22
Burner Ratings	16kW
Capacity	6 - 7 pieces duck

36" Single Layer

CDR-9S



Dimension	Ø910 x 1500 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Oil Overflow Pipe	Ø22
Burner Ratings	16kW
Capacity	8 - 9 pieces duck

32" Double Layer

CDR-8D



Dimension	Ø810 x 1400 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Oil Overflow Pipe	Ø22
Burner Ratings	16kW
Capacity	6 - 7 pieces duck

36" Double Layer

CDR-9D



Dimension	Ø910 x 1500 mm H
Fuel	NG: DN20 ; LPG: DN20 ; TG: DN20
Oil Overflow Pipe	Ø22
Burner Ratings	16kW
Capacity	8 - 9 pieces duck

Full Height Pig / Duck Roaster

39" Double Layer

CDR-10S



Dimension	Ø1000 x 1900 mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
Oil Overflow Pipe	Ø22
Burner Ratings	28kW
Capacity	10 – 11 pieces duck or 3 - 4 pieces pig

* All Specifications are subjected to change without prior notice.

PIG ROASTER

Custom solutions

- 1100mm depth version available for full height pig

CPR-096WS

Features

Bar burners with V-shape splasher

Full-length bar burner design for generating powerful heat to roast the pig with crispy skin

Pilot ignition gun

Long ignition gun for easy start up of the equipment

- **Full width crumb tray**
- **Firebrick insulation for durability**
- **Capacity:**
  - CPR-096W: 1nos of sucking pig
  - CPR-098W: 2nos of sucking pig

SPECIFICATIONS

Pig Roaster

620mm Width

CPR-096WS



Dimension	620 x 900 x 600 mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
Burner Type	Bar burner x 3
Burner Ratings	36kW

850mm Width

CPR-098WS



Dimension	850 x 900 x 600 mm H
Fuel	NG: DN25 ; LPG: DN25 ; TG: DN25
Burner Type	Bar burner x 5
Burner Ratings	60kW
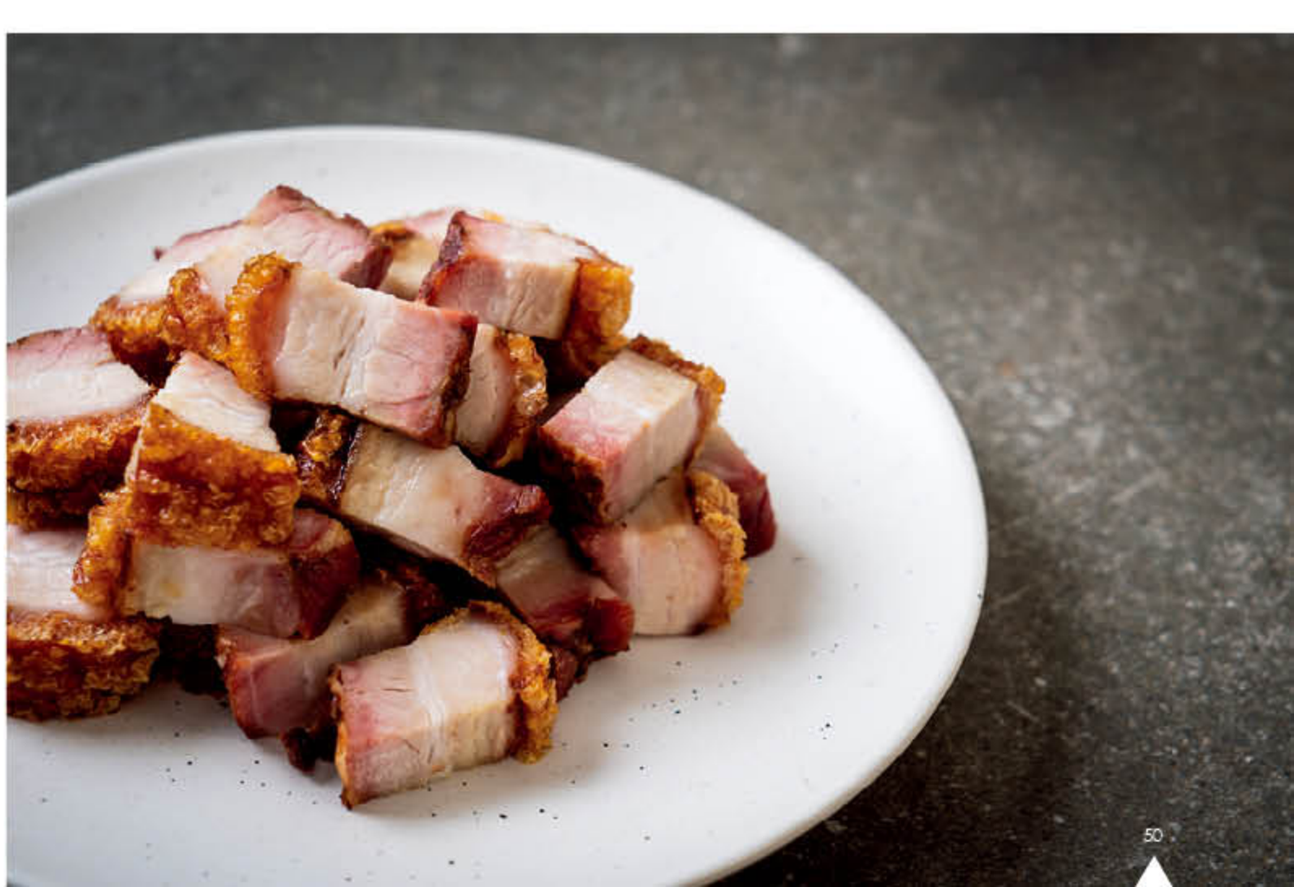
* All Specifications are subjected to change without prior notice.